


Power supply part (RVI-4013)

Allowable voltage:
AC80~240V (50/60Hz) / DC20~240V
 Output contact configuration: **1transfer (1C)**
 Contact maximum allowable power: **50VA**
 Contact maximum allowable voltage: **250V**
 Contact maximum allowable current: **3A**
 Power consumption: **2.5W**
 Ambient temperature: **-20°C~+50°C**
 (No condensation or freezing)

※ When using this product, be sure to ground it with A-type grounding, because it has a dedicated "A-type grounding terminal".

Material of case body and lid: **Iron (coating)**
 Certification test pass number: **T68371**
 Intrinsically safe explosion-proof: **3nG5**

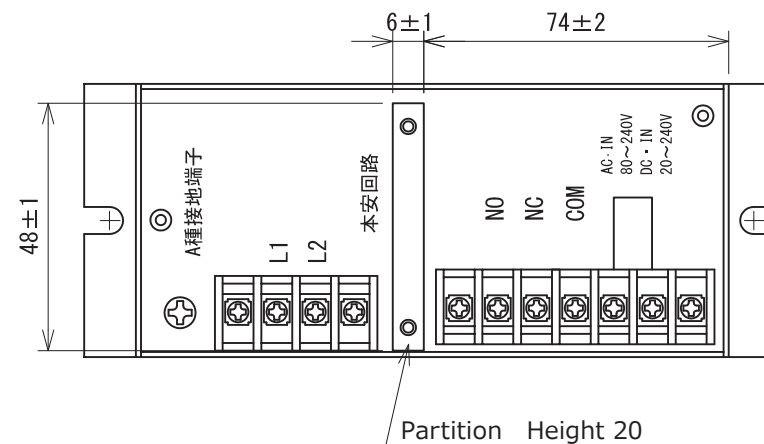

			TITLE	DS type power supply part (barrier) outline drawing				PROJECTION THIRD ANGLE	SCALE /	DWG No.	A 1 7 0 6 - 8 5 6 6 2/3
			REVISION	APPROVED	CHECKED	DRAWN	DATE				
M. K	DATE	REVISION					2017. 07. 10				